

1970 - 2020

Alemlube

1 MAY - 30 JUNE 2020

### 670AN5 Alemlube 20V Lithium-ion Cordless Grease Gun

- Delivery rates of up to 170g/min (high) & 113g/min (low)
- Grease pressures of up to 10,000psi (690bar)
- Built in Intelligence
- Up to 35 cartridges per battery charge
- LCD with real time battery capacity, grease level and metering information

**\$1,260.00**



### 660AN Alemlube Trigger Action Grease Gun

- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- Twin Lock System seals the piston and eliminates the possibility of dummy lubrication
- 4 jaw coupler and flexible 30cm long extension
- High volume / high pressure option facilitates fast and efficient greasing
- Manufactured in Germany

**\$122.10**



### 14512 Alemlube Quick Release Grease Gun Coupler

- Works with all grease gun types - pneumatic, manual and battery
- 1/8" BSPT(f) thread
- Maximum working pressure of 10,000psi (690bar)
- 90mm in length

**A14512** as above but blister packed **\$39.00**

**14510** 1/8" BSP(f) 135mm long **\$56.10**

**14511** 1/8" NPT(f) **\$46.00**

**\$37.60**



### 600A Alemlube Lever Action Grease Gun

- Delivery rates of up to 1.6g grease per stroke
- Grease pressures of up to 12,000psi (828bar)
- Suitable for all grease grades up to NLGI3
- Twin Lock System seals the piston and eliminates the possibility of dummy lubrication
- Manufactured in Germany

**\$89.60**



### Alemlube

#### Lockable Diesel Refuelling Storage and Dispensing Kits

- Heavy duty, robustly constructed polyethylene tank
- Built in nozzle holster
- Lockable lid aids diesel fuel security and protects dispensing kit components
- Unique user friendly design with lockable lid to aid fuel and dispensing kit security
- Dispensing kit consists of a 12V pump, antistatic fuel delivery hose, 2 metre battery cables and auto nozzle
- Forklift lift points and tie down capability
- Tank baffles aid vehicle stability
- Suits all marques of single and twin cab utes



PRODUCT NUMBER	CAPACITY	FLOW RATE	W/METER	PRICE
L10040PA	100L	50L/min	—	\$1,104.00
L20040PA	200L	50L/min	—	\$1,181.00
L45040PA	450L	50L/min	—	\$1,615.00
L60040PA	600L	50L/min	—	\$1,759.00



## HOSE REELS



**SA300N**

### Alemlube S Series Air Hose Reel

- 18m x 10mm ID hybrid polymer hose & 0.9m lead in hose
- Impact resistant UV stabilised covers for maximum durability
- 3/8" BSPT inlet/outlet
- High flow swivel and fluid path
- Dimensions: 490mm (L) x 448mm (H) x 228mm (W)

**\$292.30**



**HR40030**

### Alemlube EL Series Air Hose Reel

- Supplied complete with 20m x 10mm ID PVC hose and 0.9m lead in hose
- Increase safety by reducing rewind speed by up to 80%
- 3/8" BSPT inlet/outlet
- Working pressure of 300psi (20bar)
- Hose guide system rewinds the hose without kinks

**\$232.90**



**SO600**

### Alemlube S Series Oxy-Acetylene Hose Reel

- Max working pressure of 300psi (20bar)
- 15m x 6mm ID hose & 0.9m lead in hose
- Impact resistant UV stabilised covers for maximum durability
- 5/8" BSPT inlet/outlet
- Adjustable spring tension & high flow swivel and fluid path
- Ideal for back of UTE or service vehicle mobile use

**\$522.00**



**505224N**

### Samoa Oil Hose Reel

- Heavy duty full metal double pedestal construction
- Hose capacity: 15m x 19mm ID delivery hose and 0.8m lead in hose
- Hose pressure rating 1,500psi (103bar)
- 3/4" BSP(f) inlet/outlet
- True 3/4" full flow shaft & ports
- Also suitable for fuel, water and air

**\$2,409.00**



**505232**

### Samoa Oil Hose Reel

- Dual ball bearing spool support results in very low rotary friction
- Optimised power spring and low friction design ensure smooth & comfortable operation
- 20m x 12mm ID delivery hose and 0.8m lead in hose
- Also suitable for fuel, water and air

**\$2,298.00**



**504250**

### Samoa Oil Hose Reel

- Maximum working pressure of 2,300psi (160bar)
- Supplied complete with 15m x 1/2" ID R1 hose and 0.8m inlet hose
- Full 1/2" ID port, shaft and swivel
- 1/2" BSPT(m) inlet/outlet
- Narrow footprint 168mm wide
- Versatile positioning hose guide arm

**\$1,489.00**



**HR90005**

### Alemlube EL Series Air, Water & Fuel Hose Reel

- Reinforced steel frame provides maximum strength and stability
- Working pressure of up to 300psi (20bar)
- Includes 30m x 25mm ID rubber hose & hose stop
- Reliable spring life of 20,000 cycles & positive ratchet lock design

**\$1,934.00**



**HR90035**

### Alemlube EL Series Air, Water & Fuel Hose Reel

- Reinforced steel frame provides maximum strength & stability
- Working pressure of up to 300psi (20bar)
- Includes 50m x 12mm ID rubber hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges

**\$2,011.00**



**SG800**

### Alemlube S Series Grease Hose Reel

- Supplied with 10m x 6mm ID hose & 0.9 lead in hose
- Working pressure of up to 5,000psi (345bar)
- 1/4" BSPT(f) inlet & outlet
- High flow swivel and fluid path
- Can be wall, ceiling or floor mounted

**\$402.00**





**WP1290**  
**Alemlube**  
**Large Capacity Water Hose Reel**

- Stores and retrieves up to 30m x 12mm ID hose
- Durable impact and weather resistant covers ensure a long working life
- 3/4" BSPT(m) inlet/outlet
- Convenient carry handle facilitates easy movement of the hose reel as required

**\$351.00**



**HR40040**  
**Alemlube EL Series**  
**Air Hose Reel**

- Supplied complete with 15m x 12mm ID PVC hose and 0.9m lead in hose
- Increase safety by reducing rewind speed by up to 80%
- 1/2" BSPT inlet/outlet
- Max working pressure of 300psi (20bar)
- Constant speed control device ensures safe hose assembly rewind

**\$255.80**



**SA400N**  
**Alemlube S Series**  
**Air Hose Reel**

- 15m of 12mm ID hybrid polymer hose
- Adjustable spring tension
- New hybrid polymer hose is more flexible, easier to handle and longer lasting
- Can be wall, ceiling or floor mounted
- Working pressure of 300psi (20bar)
- 1/2" BSPT(f) inlet & outlet

**\$311.00**



**8078-H**  
**Alemite 15m x 1/2"**  
**Heavy Duty Hose Reel**

- Anti lock ratchet
- Sealed and plated bearings
- Power spring cassette
- Metal arbor
- Mounting heights up to 6m
- Suitable for air, water or oil with 15m x 12mm ID hose

**\$2,496.00**



**508225**  
**Samoa 15m x 1"**  
**High Volume Hose Reel**

- Supplied with 15m x 1" BSPT(f) ID hose
- 1,250psi (86bar) hose pressure rating
- 1" port nickel coated steel shaft and swivel
- Suitable for use with fuel, oil, air, water and waste oil
- Ideal for high volume applications
- Manufactured in Spain

**\$2,929.00**



**8080-G**  
**Alemite 15m x 1" Heavy Duty**  
**Spring Rewind Hose Reel**

- Sealed spring cassette
- Sealed and plated bearings
- Lifetime warranty on the hose guide assembly and latch pawl spring
- Suitable for the transfer of air, water, oil and fuel

**\$3,440.00**



**504351**  
**Samoa Twin Pedestal**  
**Grease Hose Reel**

- Max working pressure of 4,060psi (280bar)
- 3/8" BSP(m) inlet/ 1/4" BSP(m) outlet
- Supplied complete with 15m x 3/8" ID R2 hose and 0.8m inlet hose
- Heavy duty double pedestal construction

**\$1,685.00**



**HR90020**  
**Alemlube EL Series Air & Water**  
**Spring Rewind Hose Reel**

- Reinforced steel frame provides maximum strength & stability
- Working pressure of up to 300psi (20bar)
- Includes 40m x 19mm ID rubber hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges

**\$2,355.00**



**HR90010**  
**Alemlube EL Series Air & Water**  
**Spring Rewind Hose Reel**

- Working pressure of up to 300psi (20bar)
- Includes 15m x 25mm ID rubber hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Reliable spring life of 20,000 cycles and positive ratchet lock design

**\$1,597.00**



**NEW**

**JP-140-PP-HC-1000**

**205L Chemical Drum Pump Kit with Polypropylene Pump Tube - 240V**

- Flow rates of up to 49L/min
- Supplied complete with electric motor & poly pump tube, 2m PVC hose, stainless steel hose clamps and polypropylene nozzle
- Suitable for hydrochloric acid, phosphoric acid, liquid fertiliser, citric acid, iron(II) & iron(III), chloride and distilled water
- Manufactured in Germany

**JP-140-PP-HC-1200** also available to suit 1,000L IBC's **\$1,668.00**

**\$1,645.00**



**NEW**

**JP-140-PVDF-HC-1000**

**205L Chemical Drum Pump Kit with Polypropylene Pump Tube - 240V**

- Flow rates of up to 49L/min
- Supplied complete with electric motor & poly pump tube, 2m PVC hose, stainless steel hose clamps and polypropylene nozzle
- Suitable for hydrofluoric acid, sodium, hydrochloride, sulphuric acid to a concentration of 90%

**JP-140-PVDF-HC-1200** also available to suit 1,000L IBC's **\$2,506.00**

**\$2,392.00**



**NEW**

**JP-180-PP-HC-1000**

**205L Chemical Drum Pump Kit with Polypropylene Pump Tube - 240V**

- Flow rates of up to 93L/min
- Supplied complete with electric motor, 1,000mm polypropylene pump tube, 2m PVC hose, stainless steel hose clamps and polypropylene nozzle
- Suitable for hydrochloric acid, phosphoric acid, liquid fertiliser, citric acid, iron(II) & iron(III), chloride and distilled water

**JP-180-PP-HC-1200** also available to suit 1,000L IBC's **\$2,516.00**

**\$2,410.00**



**JP-280-ALU-HC-1000**

**205L Drum Pump Kit with Aluminium Pump Tube - 240V**

- Flow rates of up to 112L/min
- Supplied complete with electric motor, 1,000mm pump tube, 2m mineral oil hose, stainless steel hose clamps and aluminium nozzle
- Suitable for synthetic oils, hydraulic oils and engine oils up to 1000 M/PAS, diesel and liquid soap

**\$2,697.00**



**225**

**Alemlube Polypropylene Syphon Drum Pump**

- Delivers 500mL on the up stroke
- 316 stainless steel body, outlet spout and pick up tube and piston with adjustable PTFE seals
- Adjustable outlet spout
- Suitable for use with petrol, diesel fuel, kerosene, thinners, nitric acid, toluene, hydrochloric acid, sulphuric acid, acetic acid and water

**\$68.50**



**PE-038**

**Alemlube 3/8" Air Operated Diaphragm Pump**

- Maximum flow rates of up to 34L/min
- 3/8" BSPT(f) inlet/outlet
- Minimum and maximum air pressure of 20-120psi (1-8bar) respectively
- 1/4" NPT(f) air inlet
- Total dry lift of up to 5.2m
- Ideal for the transfer of high viscosity, coagulating & abrasive fluids inclusive of solids up to 6.4mm o.d.

**\$983.00**



**801A**

**Alemlube Stainless Steel Rotary Drum Pump**

- Rotary action facilitates quick and effortless fluid transfer
- 2" standard BSPT bung adaptor
- Suits 60L or 205L drums
- Flow rates of up to 18L/min or 0.3L per rotation
- Suitable for the transfer of ammonia, ethyl acetate, methyl acetate, AdBlue® and nitric acid up to a concentration of 50%

**\$578.00**



**301A**

**Alemlube Polypropylene Rotary Drum Pump**

- Flow rates of up to 20L/min
- Polypropylene, teflon and stainless steel construction offer's excellent chemical resistance
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for the transfer of herbicides, pesticides, chemicals and mild detergents

**\$214.70**



**950**

**Alemlube Lever Action Poly Drum Pump**

- Suitable for the transfer of pesticides, herbicides, mild acids and detergents
- Delivers 330mL on the down stroke
- Polypropylene body, piston and valves with nitrile seals
- Suitable for 60L or 205L drums

**950V with Viton seals \$207.30**

**\$131.00**





**NEW**



**JP-180-PVDF-HC-1000**  
**205L Chemical Drum Pump Kit with Polypropylene Pump Tube - 240V**

- Flow rates of up to 93L/min
- Supplied complete with electric motor, 1,000mm polypropylene pump tube, 2m PVC hose, stainless steel hose clamps and polypropylene nozzle
- Suitable for hydrofluoric acid, sodium, hydrochloride, sulphuric acid to a concentration of 90%

**JP-180-PVDF-HC-1200** also available to suit 1,000L IBC's \$4,226.00

**\$4,081.00**

**NEW**



**JP-280-PP-HC-1000**  
**205L Drum Pump Kit with Polypropylene Pump Tube - 240V**

- Flow rates of up to 112L/min
- Supplied complete with electric motor, 1,200mm polypropylene pump tube, 2m multi-purpose chemical hose, stainless steel hose clamps and PVDF nozzle
- Suitable for hydrochloric acid, phosphoric acid, liquid fertiliser, citric acid, iron(II) & iron(III), chloride and distilled water

**JP-280-PP-HC-1200** also available to suit 1,000L IBC's \$2,769.00

**\$2,697.00**

**NEW**



**JP-280-PVDF-1000**  
**205L Drum Pump Kit with PVDF Pump Tube - 240V**

- Flow rates of up to 112L/min
- Supplied complete with electric motor, 1,000mm PVDF pump tube, 2m multi-purpose chemical hose, stainless steel hose clamps and PVDF nozzle
- Suitable for hydrofluoric acid, sodium, hydrochloride, sulphuric acid to a concentration of 90%

**JP-280-PVDF-1200** also available to suit 1,000L IBC's \$4,346.00

**\$4,153.00**



**ALE-25BST**  
**Alemite**  
**1" Air Operated Stainless Steel Diaphragm Pump**

- Maximum flow rates of 160L/min
- 1" BSPT(f) inlet/outlet
- Use with solids up to 3mm OD
- Air supply pressure range: 0.2-0.7 MPa
- Suitable for the transfer of MEK (methyl ethyl ketone), hydrochloric acid up to 20% concentration, phosphoric acid, methanol, paint thinners and water

**\$4,005.00**

**7835-SDTR**  
**Alemite 5:1 Ratio**  
**Stainless Steel Drum Pump**

- 5:1 ratio fluid suits 205L drums
- Flow rates of up to 17L/min
- Teflon seals
- 1/4" NPT(f) air inlet
- 3/4" NPT(f) fluid outlet
- Suitable for the transfer of higher viscosity fluids including detergents, anti-corrosion fluids, wood varnish and adhesives

**\$6,845.00**



**EXPLOSION PROOF**  
**NEW**



**JP-440EX-SS-SS-1000**  
**205L Drum Pump Kit with Stainless Steel Pump Tube - 240V**

- Flow rates of up to 82L/min
- Supplied complete with explosion proof electric motor, 1,000mm stainless steel pump tube, 2m multi-purpose hose, stainless steel hose clamps and brass nickel plated nozzle and a bonding ground set
- Suitable for acetone, alcohol, solvents, nitric acid, trichloroethylene acid, toluene and ammonia


**JP-480EX-SS-SS-1200** also available to suit 1,000L IBC's \$6,445.00

**\$6,072.00**

**2006SS**  
**Alemite**  
**Stainless Steel Drum Pump**

- Delivers 0.25L per stroke
- 316 grade stainless steel parts with teflon seals
- Suitable for the transfer of acids and solvents including toluene and acetyl acid
- Pumps on the down stroke
- Suits 20L drums


**\$319.00**

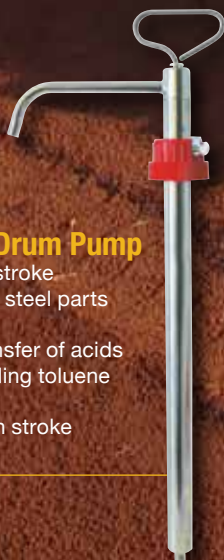

**733**  
**Alemite**  
**Stainless Steel Drum Pump**

- Delivers 500mL on the up stroke
- 316 stainless steel body, outlet spout and pick up tube and piston with adjustable PTFE seals
- Also features an adjustable outlet spout
- Suitable for the transfer of ammonia, ethyl acetate, methyl acetate, AdBlue® and nitric acid up to a 50% concentration
- Suits 60L or 205L drums

**\$410.00**

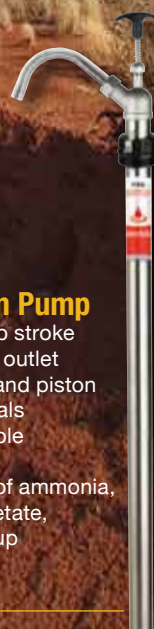

**401A**  
**Alemite**  
**Ryton Rotary Drum Pump**

- Flow rates of up to 20L/min
- Ryton and stainless steel construction provides excellent chemical compatibility
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for 60L or 205L drums
- Suitable for the transfer of low viscosity chemicals, lacquers, AdBlue® and mild acids

**\$305.00**







**L20040PA**  
**Alemlube 200L**  
**Lockable Diesel Refuelling**  
**Storage & Dispensing Kit**

- Lockable lid aids fuel and dispensing kit security
- Dispensing kit consists of a 12V pump, antistatic fuel delivery hose, 2 metre battery cables and auto shut off nozzle
- Delivery rates of up to 50L/min
- Suitable for diesel fuel only

**\$1,181.00**



**L40068PAM**  
**Alemlube 400L**  
**Lockable Diesel Refuelling**  
**Storage & Dispensing Kit**

- Electronic fuel meter
- Heavy duty, robustly constructed polyethylene tank
- Built in nozzle holster
- Automatic fuel nozzle & electronic meter
- Dimensions: 1,165mm (W) x 1,165mm (D) x 566mm (H)
- Delivery rates of up to 68L/min

**\$2,584.00**



**M150SA**  
**GPI Heavy Duty 12V**  
**Diesel Fuel Drum Pump**

- Flow rates of up to 49L/min
- Total lift of up to 7.6m
- Duty cycle of 30 minutes on and 30 minutes off
- Automatic nozzle
- Lockable nozzle holster

**\$879.00**



**407010N2**  
**Alemlube 1" Electronic**  
**Diesel Fuel Meter**

- Accurate between flow rates of 7 to 120L/min
- Accurate to  $\pm 1.0\%$
- 1" BSP inlet and outlet ports
- Maximum operating pressure of 290psi (20 bar)
- 6-digit total from 1L to 999999L

**\$401.00**



**01A12LM**  
**GPI 1" Electronic**  
**Diesel Fuel Meter**

- For use with diesel only on gravity feed or electric transfer pumps
- Flow range: 10L/min to 100L/min
- 1" BSPT(f) inlet/outlet
- Maximum working pressure of 300psi (21bar)
- Maximum batch and cumulative total: 9,999L

**\$322.00**



**5060AN**  
**Alemlube Heavy Duty Hi-Flo**  
**Refuelling Drum Pump**

- Delivers up to 110L/min
- Delivery rates of 1.1 litres per rotation
- Supplied complete with 2.6m of UV and fuel resistant hose, spout, in built spout holster, 3-piece downtube, heavy duty bung adaptor
- Transfers diesel fuel, petrol, light oils up to SAE30 and kerosene

**\$438.00**



**ALEM-2020**  
**240V Tank Gauge with LCD Display**

- Standard probe suits oil tank depths from 0.3m to 3.5m and 2.8m for water based products
- High & low level alarm
- Push button back lit display
- For use with diesel, AdBlue®, gear oil, water, AdBlue® and mild acids

**\$1,669.00**

**NEW**

**Piusi B.SMART • Flexible & Modern Blue**

Piusi B.SMART is an intuitive and simple Smart Fuel Management System comprising hardware and software driven by Bluetooth technology to easily monitor and manage diesel fuel usage in a fleet of any size, large or small.

Utilising a smart device App for drivers and a Web App on the Cloud for fleet managers, the new Piusi Smart Fuel Management System with its integrated software is fully managed in the Cloud meaning that no complicated PC installation is required to get you up and running. B.SMART allows you to manage your fleet from anywhere and to monitor all fuel transactions in real-time.

- Once the user opens the B.SMART App the Android or iOS mobile device automatically connects to the fuel station to allow the driver to refuel
- During fuel delivery, the driver can monitor the quantity dispensed directly on the mobile device and once completed can view the virtual receipt which will be sent in real-time to the Web App
- The Fleet Manager will be able to monitor in real-time all the deliveries made through the simple and immediate graphic interface of the Cloud software





& LEVEL MONITORING



**52004A**  
**Alemlube High Volume 12V Diesel Refuelling Drum Pump**

- Flow rates of up to 68L/min
- Includes an automatic shut off nozzle
- Duty cycle of 30 minutes on/off
- 1" BSPT(f) inlet/outlet thread
- Manufactured in Italy



**\$1,414.00**



**L40049GAM**  
**Alemlube 400L Lockable Diesel Refuelling Storage & Dispensing Kit**

- Dispensing kit consists of a 12V pump, 4m antistatic fuel delivery hose, 2m battery cables, automatic nozzle & electronic meter
- Delivery rates of up to 50L/min
- Tank dimensions: 1,165mm (W) x 1,165mm (D) x 566mm (H)

**\$2,638.00**



**L45040PA**  
**Alemlube Lockable Diesel Refuelling Storage & Dispensing Kit**

- Flow rates of up to 50L/min
- Built in nozzle holster
- Dispensing kit consists of a 12V pump, 4m antistatic fuel delivery hose, 2m battery cables and automatic nozzle
- Suitable for diesel fuel only

**\$1,615.00**



**501A**  
**Alemlube Rotary Action Drum Pump**

- Suitable for the transfer of diesel, petrol, kerosene, lube oil and machine oil
- 2" BSP bung adaptor
- Delivery rates of up to 18L/min or 0.26L per rotation
- Includes 2.2m of farm tank hose, bung adaptor, rubber gasket, a four chamber rotor assembly, spout and spout holster

**\$156.20**



**51039**  
**Alemlube Automatic Diesel Nozzle**

- Automatically cuts off when fuel tank is full
- Can operate with flow rates of up to 120L/min
- 1" BSPT(f) swivel included
- Suitable for applications involving an electric diesel transfer pump

**\$339.00**



**51008**  
**Alemlube 1" Mechanical Diesel Fuel Meter**

- Maximum working pressure of 142psi (10bar)
  - 1" BSPT(f) inlet/outlet ports
  - Batch total of 999L displayed with easy to read 18mm high digits
  - Suitable for gravity feed or pump applications
  - Suitable for use with diesel fuel & kerosene
- 51007 4 digit meter \$454.00**

**\$437.00**




**ALEM-5020**  
**240V Tank Gauge with LCD Display**

- Software allows calibration of any shape or size of tank
- Accuracy of  $\pm 0.25\%$  or better
- Modular option, up to 4 relays available
- For use with diesel, AdBlue®, gear oil, water, AdBlue® and mild acids

**\$2,821.00**

**tooth® Smart Fuel Management Solution**

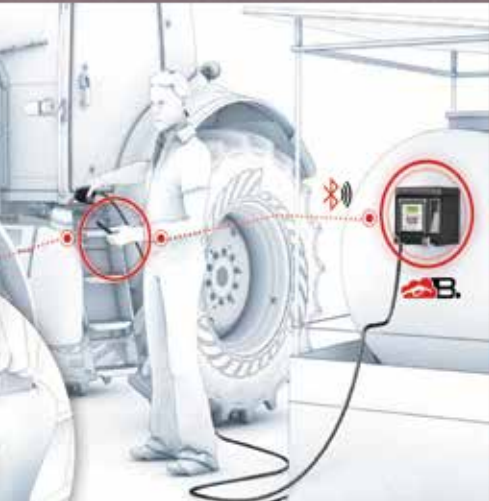

- Suitable for any fleet size, single and multi-site
- Simply open the App on any Android or iOS smart device which immediately connects to the dispenser to start the refuelling operation
- Once refuelling is stopped, a receipt is displayed on the smart device, and in real-time on the manager's Web App
- The App is connected via Bluetooth and works even if no network is available
- Quick and easy to use, saves time and money
- Integrates with Piusi Cube bowers and Piusi MCBox
- Suitable for diesel dispensing in agriculture, automotive, mining, construction, transport, logistics and industrial sectors





**371000**  
**Alemlube 12V**  
**Petrol & Avgas Tank Pump**

- Compact & sturdy construction with cast iron pump body
- Flow rates of up to 50L/min
- 1" BSPT(f) inlet/outlet
- Duty cycle of 30mins on and 60 mins off
- IECEx and ATEX approved

**\$859.00**



**395020**  
**Alemlube High Flow 240V**  
**Petrol & Avgas Tank Pump**

- Flow rates of 140L/min at end of hose & auto nozzle
- Continuous duty operation
- IECEx approved for use with petrol, Avgas and kerosene
- 1" BSP(f) outlet thread, 1-1/4" BSP(f) inlet thread
- Aluminium electric motor housing with anchoring points

**\$2,941.00**



**372010**  
**Alemlube 12V**  
**Petrol & Avgas Drum Pump**

- Suitable for the transfer of ULP, Avgas, E10, diesel and kerosene
- Automatic nozzle with flow rates of up to 50L/min
- Inbuilt nozzle holster
- 4m long antistatic fuel hose
- 30 micron filter
- Manufactured in Italy



**\$1,217.00**



**SJ-510-001**  
**Alemlube**  
**Single IBC Spill Container**

- Solid construction and practical design
- Sump capacity of 1,100L
- Compatible with most forklifts and pallet trucks
- Dimensions are 1,680mm (L) x 1,680mm (W) x 700mm (H)
- IBC not included

**\$2,564.00**



**SJ-100-002**  
**Alemlube**  
**Drum Spill Container**

- Ideal for static spill containment in factories, warehouses, workshops, garages and farm stores
- Compatible with most forklifts and pallet trucks
- Dimensions of 750mm (L) x 1,300mm (W) x 440mm (H)
- Drums not included

**\$739.00**



**SJ-110-006**  
**Alemlube 4 Drum**  
**Spill Container**

- Holds up to 4 x 205L drums
- Sump capacity of 249L (236L to underside of platform)
- Dimensions: 1,460 (W) x 1,460 (D) x 305 (H)
- Drums not included

**\$864.00**



**BRP5216**  
**Alemlube**  
**Caution Safety Barrier Reel**

- Supplied complete with 16m x 52mm of durable red/white band with eyelet
- Automatic spring rewind mechanism
- Compact design suitable to mount in most workplace environments
- A must for addressing workplace and employee safety
- Manufactured in Italy

**\$364.00**



**CR30060**  
**Alemlube EL Series**  
**240V Electric Cable Reel**

- 240V, maximum 15amp
- Supplied complete with 20m of 3 x 2.5mm<sup>2</sup> cable
- Maximum power when coiled is 1,600Ww, when uncoiled 3,200W
- Australian Standards compliant in accordance with AS/NZS 3000
- CR30050 in 10amp **\$337.00**

**\$368.00**



**HR90005BSS**  
**Alemlube EL Series**  
**Stainless Steel Spring Rewind**  
**Hose Reel**

- Working pressure of up to 300psi (20bar)
- 30m x 25mm ID rubber hose capacity
- Working temperature of -20°C - +60°C
- 1.5mm thick robust drum assembly with stiffening ribs & flange edges
- Reliable spring life tested to 20,000 cycles
- Suitable for air and water

**\$3,083.00**





**374010**  
**Alemlube 240V**  
**Petrol & Avgas Drum Pump**

- Transfers ULP, E10, diesel, kerosene and Avgas - IECEx and ATEX approved
- Automatic nozzle with flow rates of up to 50L/min
- 4m x 3/4" ID antistatic fuel hose
- Fully-flanged components: pump, flow meter & filters easily fitted or replaced

**\$1,457.00**



**339000**  
**Alemlube 2" High Flow 240V**  
**Diesel Tank Pump**

- Flow rates of up to 190L/min
- Maximum operating pressure of 58psi (4bar)
- Continuous operation
- Operating temperature range of -10°C - +40°C
- No power cable included: an electrician must hard wire


**\$2,469.00**



**395050**  
**Alemlube Heavy Duty**  
**High Flow 240V Diesel Pump**

- Flow rates of up to 140L/min at end of hose & auto nozzle
- Sintered steel rotor & acetal resin vanes
- 1" BSP outlet thread, 1-1/4" BSP inlet thread
- Cast iron body with rust resistant coating
- Continuous duty operation

**\$1,380.00**

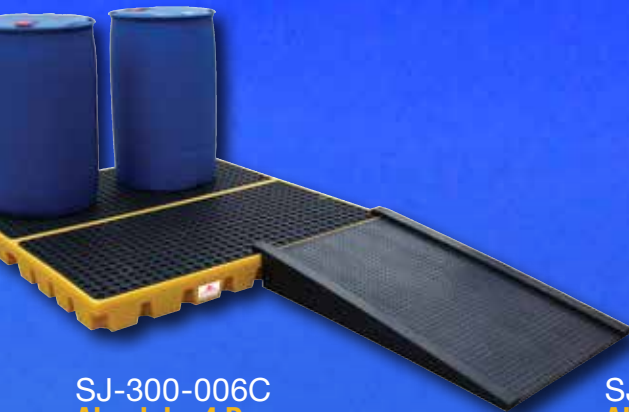

**SJ-300-006C**  
**Alemlube 4 Drum**  
**Workfloor & Spill Container**

- Slip resistant texture on workfloor deck and ramp
- Cannot rust or corrode
- Sump capacity of 240L
- Dimensions of 1,600mm (L) x 1,600mm (W) x 150mm (H)
- Drums not included

**\$1,486.00**



**SJ-200-010**  
**Alemlube**  
**Drum Rack & Spill Container**

- 100% recyclable polyethylene construction
- Sump capacity of 450L
- Dimensions of 940mm (L) x 1,375mm (W) x 390mm (H)
- Tested to DIBt specification
- Drums not included

**\$1,816.00**



**SJ-520-001**  
**Alemlube**  
**Double IBC Spill Container**

- Non-skid removable deck
- Sump capacity of 1,165 litres to underside of the deck
- Dimensions: 575mm (H) x 2,260mm (W) x 1,460mm (D)
- Manufactured in the UK

**\$4,494.00**



**HR90045BSS**  
**Alemlube EL Series**  
**Stainless Steel Spring Rewind**  
**Hose Reel**

- Bare reel can store and retrieve up to 25m x 12mm ID hose
- Reinforced Stainless Steel frame provides maximum strength & stability
- Ideal for corrosive marine, dairy and food & beverage applications

**\$2,077.00**



**ECRP24025**  
**Alemlube**  
**240V Electric Cable Reel**

- The ideal and safest way to store electric cable
- Supplied with 25m x 3 x 1.5mm<sup>2</sup> wires cable & plugs
- Maximum power when coiled 800W - uncoiled 2,000W
- Fully extend the electric cable prior to switching on mains power

**\$539.00**



**BRP5216-YAB**  
**Alemlube Danger Barrier Reel**

- Provides a temporary barrier to clearly identify dangerous areas
- Supplied complete with 16m x 52mm of durable yellow/black band with eyelet
- Compact design suitable to mount in most workplace environments
- A must for addressing workplace and employee safety

**\$364.00**



## GREASING EQUIPMENT



### G10010N Alemlube EL Series Trigger Action Grease Gun

- Grease pressures of up to 4,000psi (276bar)
- Delivers up to 1.15g per stroke
- Robust die cast aluminium head assembly
- Plastic handle grip
- Heavy duty 4 jaw coupler

**\$60.20**



### G10040N Alemlube EL Series 18V Lithium-ion Cordless Grease Gun

- Generates grease pressures of up to 10,000psi (690bar)
- Capable of delivering up to 80g/min
- 25 minutes continuous working time
- Supplied with two batteries
- Dispenses grease from up to 12 x 450g cartridges before changing over or recharging of the 3,000 mAh battery is required

**\$505.00**



### 680AN Alemlube Air Operated Grease Gun

- Develops grease pressures of up to 3,290psi (226bar)
- Pressure ratio of 40:1
- Delivers up to 180g per minute
- Recommended maximum air pressure of up to 98psi (6bar)
- Suitable for use with grease up to NLGI2

**\$343.00**



### 7531-A4 Alemlube 20kg Lever Action Grease Kit

- For all greases up to NLGI3
- Equipped with a 1.8m delivery hose and heavy duty 3 jaw coupler
- 3/8" NPT(f) outlet
- Follower plate and carry handle included
- 4,000psi (276bar) grease pressure

**\$855.00**



### 9911H Alemlube 20kg Grease Kit

- Spool valve air motor design requires minimum maintenance and results in fewer pump failures
- 50:1 ratio grease pump develops grease pressures of up to 7,500psi (517bar)
- Single shot or continuous flow hand piece provides greater lubrication options

**\$2,068.00**




### 424170 Samoa 20kg Grease Kit

- 55:1 ratio air motor develops grease pressures of up to 7,950psi (548bar)
- Will handle high density, tacky greases up to NLGI2
- Supplied with a 4m long hose assembly
- Cast alloy air motor cylinder won't wear or distort prematurely
- Manufactured in Spain

**\$1,221.00**

## EL Series Tube and Hose Fittings

Part Number	EL Series Tube & Hose	Price
HP8.3GF-50	Hose 8.3mm dia 280 bar grease filled (50m rolls)	\$438.00
TN6GF-100	Tube nylon 6mm dia 70 bar grease filled (100m rolls)	\$455.00
HP8.3E-50	Hose 8.3mm dia 280 bar empty (50m rolls)	\$377.00
TN6E-100	Tube nylon 6mm dia 70 bar empty (100m rolls)	\$377.00
HSL83	8.3 hose end sleeve	\$3.50
HST630	8.3 hose end stud (straight) 30mm	\$3.50
HS90621	8.3 hose end stud 90° 21mm long	\$11.20
CS6B18	Straight connector 6mm tube x 1/8" BSP(f)	\$3.20
CE6B18	Elbow connector 6mm tube x 1/8" BSP(f) 90°	\$6.50
CS6M6	Straight connector 6mm tube x m6 / 1	\$6.50

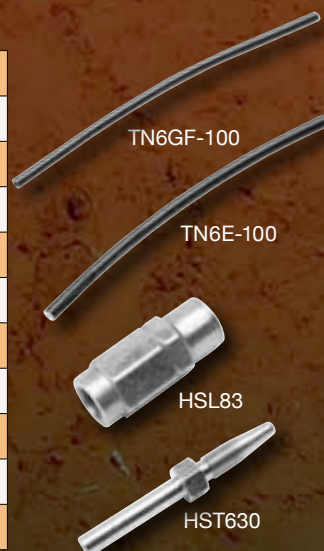

## Grease Gun Couplers and Grease Gun Flexes

Part Number	Grease Gun Couplers
14512	Quick Release Grease Gun Coupler
14510	Extra Long Quick Release Grease Gun Coupler
14511	Quick Release Grease Gun Coupler
14513	4 Jaw Grease Gun Coupler
14514	3 Jaw Grease Gun Coupler
Part Number	Grease Gun Flexes
14551	30cm Grease Gun Flex
14552	45cm Grease Gun Flex
14553	70cm Grease Gun Flex





### G10020N Alemlube EL Series Trigger Action Grease Gun

- Grease pressures of up to 8,000psi (552bar)
- Delivery rates of up to 0.95g per stroke
- Robust die cast head assembly
- Ideal for seasonal or intermittent use
- Plastic handle grip
- Heavy duty 4 jaw coupler

**\$41.60**



### 660ANK2 Grease Gun & Accessories Kit

- Keeps grease gun, commonly used accessories and grease cartridge all together
- Kit includes: carry case, 660AN trigger action grease gun, B203 90° adapter with coupler, B200 injector needle, 14509 needle nose adapter and 308730 3 jaw coupler
- 450g Grease cartridge not included

**\$259.00**



### G10051 Alemlube EL Series Mini Pistol Grease Gun

- Delivers up to 2,900psi grease pressure
- Two way loading: Suits 85g grease cartridge or bulk grease
- Supplied with a 10cm rigid extension and 23cm flexible extension
- Suitable for applications where space and access is limited
- 4 jaw coupler included

**\$34.30**



### 9979H Alemlube 180kg Grease Kit

- Heavy duty RAM pump
- Double acting for high flow
- Approximate delivery: 2kg's per minute
- Kit comes complete with 50:1 ratio RAM pump, drum cover, follower plate, 8ft of hose, Z swivel and control valve
- Manufactured in the USA

**\$3,037.00**



### 428262 Samoa 180kg Grease Kit

- 55:1 ratio grease pump develops up to 7,950psi (548bar)
- Integral filter eliminates the chance of pump tube contamination
- Lightweight ergonomic, cast alloy, grease control valve included
- Manufactured in Spain

**\$1,856.00**



### G100120 Alemlube EL Series 20kg Grease Pump

- Delivers up to 600g/min
- Maximum grease pressure of 5,800psi (400bar)
- Air inlet pressure from 70psi (5bar) to 150psi (10bar)
- Spare parts readily available
- An exceptional value proposition

**\$744.00**

### Grease Gun Flexes



	Price
Grease Gun Coupler - 1/8" BSP(f)	\$37.60
Grease Gun Coupler - 135mm long	\$56.10
Grease Gun Coupler - 1/8" NPT(f)	\$46.00
Grease Gun Coupler	\$11.90
Grease Gun Coupler	\$12.00
	Price
Grease Gun Flex - 1/8" BSP(f)	\$16.60
Grease Gun Flex - 1/8" NPT(f)	\$17.30
Grease Gun Flex - 1/8" NPT(f)	\$27.70



### 413080 Samoa Grease Control Valve with Z Swivel

- Maximum working pressure of 7,150psi (500bar)
- 1/4" BSPT(f) inlet thread
- Ergonomic body & trigger design
- Fully serviceable
- Manufactured in Spain

**\$203.30**



### L4675 101 Piece Industrial Grease Nipple Assortment Kit

- All grease nipples included in the kit are case hardened, fully chromated, zinc passivated, batch tested to 8,000psi (552bar) and conform to international standards including BSS 1486, DIN 71412, SAE J534 and JIS B1575
- Manufactured in the UK

**\$90.70**







750050

**Alemlube AdBlue® 3/4" Hose Reel**

- Supplied with 15m x 3/4" EPDM hose, swivel and hose tail fitting
- Inlet with swivel: 3/4" BSPT(f)
- Outlet hose tail: 3/4" BSPT(f)
- Rated to 140psi (10bar)
- Pressure loss of 14.5psi (1bar) @ 35L/min
- Dimensions: 475mm x 200mm x 495mm

**\$1,469.00**



332080N2

**Alemlube AdBlue® Rotary Drum Pump**

- Flow rates of 380ml per rotation or up to 38L/min
- 3-piece downtube suits 20L, 60L and 205L drums
- Complete with Trisure and Mauser drum adaptors
- 2.5m clear delivery hose complete with stainless steel spout

**\$333.00**



332100

**Alemlube AdBlue® Rotary IBC Hand Pump**

- Output rate of 38L per 100 revolutions
- Suction hose length of 1m
- Delivery hose length of 2.5m
- Suitable for use with AdBlue®
- Stainless steel metal components
- Also suitable for oil and diesel transfer

**\$484.00**



100200

**Alemlube AdBlue® 240V Extraction & Delivery System**

- Allows rapid, reliable & clean dispensing of AdBlue® into diesel vehicles
- Adjustable flow rate from 2 to 11L/min
- Compatible with all passenger vehicle AdBlue® tanks
- Trolley is compatible with 60L to 205L drums

**\$5,906.00**



6336N

**Alemlube 2.5kg Spring Operated Grease Kit**

- Grease pressures of up to 10,000psi (690bar)
- Up to 30 shots before the hand piece needs to be reloaded with grease
- High volume or high pressure option reduces greasing down time

**\$328.00**



M125/PL1



E60/PL1



PLC120/MAIN



BT60/PL1



7701A

**Alemlube 1L Multi Purpose Top Up Kit**

- Ideal for topping up difficult to access oiling points
- Suitable for all oils, automatic transmission fluids, brake fluids and some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use

**\$25.70**



20033

**Alemlube LED Pocket Work Light**

- COB LED main light, 60/200lm
- 3.7V 700mAh Li-ion battery
- SMD LED top light, 120lm
- 80 CRI, 6500K
- 5 hours, 2-1/2 hours main light run time
- 3 hours top light runtime
- 2-1/2 hours charge time

**\$69.60**



20055

**Alemlube LED Flood Light**

- COB LED, 500/1000/2100lm
- 11.1V 4400mAh Li-ion battery
- 80 CRI, 6500K
- IP65 water resistance rating
- IK07 impact resistance rating
- Three brightness settings: 500 lm, 1,000 lm, 2,100 lm with run times of 9 hours, 5 hours, 2-1/2 hours
- 3-1/2 hours charge time
- Optional extra mounting stand also available

**\$213.40**





### 201311 Alemlube AdBlue® IBC Kit with Diaphragm Pump

- Consists of a 1/2" air operated diaphragm pump, hose reel, meter and nozzle
- Pump delivery rates of up to 45L/min
- Hose reel supplied with 8m x 3/4" EPDM hose, swivel and hose tail fitting
- IBC not included

**\$3,753.00**

### Pulsarlube Single & Multi Point Grease Lubricators

Part Number	Pulsarlube E Series	Price
E60/PL1	60cc - Filled with PL1 Grease	<b>\$69.80</b>
E120PL1	120cc - Filled with PL1 Grease	<b>\$75.20</b>
E240/PL1	240cc - Filled with PL1 Grease	<b>\$83.30</b>

- Electro-chemical operation generates inert nitrogen gas
- Grease pressure of up to 70psi (5bar)
- Frequent low volumes

Part Number	Pulsarlube M Series	Price
M60/PL1	60cc - Filled with PL1 Grease	<b>\$398.00</b>
M125PL1	125cc - Filled with PL1 Grease	<b>\$394.00</b>
M250/PL1	250cc - Filled with PL1 Grease	<b>\$410.00</b>
M500/PL1	500cc - Filled with PL1 Grease	<b>\$507.00</b>

- Long term reliable electro-mechanical operation
- Large LED screen
- Easy to programme
- Reduced costs

Part Number	Pulsarlube BT Series	Price
BT60/PL1	60cc - Bluetooth Filled with PL1 Grease	<b>\$536.00</b>
BT120PL1	120cc - Bluetooth Filled with PL1 Grease	<b>\$562.00</b>
BT240/PL1	240cc - Bluetooth Filled with PL1 Grease	<b>\$604.00</b>

- Bluetooth operation
- Up to 8 points
- Reduced downtime
- Delivers best practice lubrication solutions

Part Number	Pulsarlube PLC Series	Price
PLC120/MAIN	120cc - Main Empty Unit Interval Type	<b>\$561.00</b>
PLC240/MAIN	240cc - Main Empty Unit Interval Type	<b>\$582.00</b>
PLC480/MAIN	480cc - Main Empty Unit Interval Type	<b>\$684.00</b>

- PLC operation
- Wire lengths of up to 10m
- Discharge periods from fortnightly to 24 months
- Reduced component wear



### 20066N2 Alemlube LED Work Light with Aircon Gas Leak Detection Capabilities

- The UV light is ideal for detecting Ultra Violet leak detection dye used in vehicle air conditioning systems
- 3.7V 2200mAh Li-ion battery
- 3 hours main light run time
- 10 hours top light run time
- 28 hours top UV light run time

**\$74.50**

### 20088 Alemlube LED Slimline Work Light

- 7W COB LED, min-max 60-700lm
- 3.7V 2600mAh Li-ion battery
- 3W SMD top LED, 120lm
- 80 CRI, 6500K
- 16-1/2 hours main light run time
- 9-1/2 hours top light run time
- 4 hour charge time
- Optional extra mounting stand also available

**\$91.80**



### 101000 Alemlube AdBlue® IBC Storage & Dispensing Kit with Meter

- Heavy duty self priming membrane pump and manual nozzle
- 6m delivery hose
- Includes a 1.5m suction hose pump to the top IBC mounting adaptor
- Flow rates of up to 32L/min
- Pump duty cycle of 20 minutes on/off
- IBC not included

**\$2,154.00**



### 8338 Alemlube Foot Operated Grease Bucket Pump

- Grease pressures of up to 10,000psi (690bar)
- Delivery rates of up to 2.7g per stroke
- Coupler pressure rating of 10,000psi (690bar)
- 1/8" BSPT(f) quick connect coupler thread
- 8kg reservoir capacity

**\$690.00**



### 6603A Alemlube Brake Cleaner Sprayer

- Tool free maintenance
- Ergonomic design
- Strong translucent bottle with level indicator
- Safety valve at 36psi (2.5bar) with depressurisation option
- Not suitable for use with acids


**\$52.40**



## 8828N2 Alemlube 20L Gear Oil Drum Pump

- Capable of delivering up to 70mL per stroke
- Downtube extension and extra Rieke adaptor make the pump suitable for use with a variety of 20L drums available on the market
- Ideal pump for the transfer of engine, gear, diff and hydraulic oils in busy vehicle servicing workshops

**\$49.40**

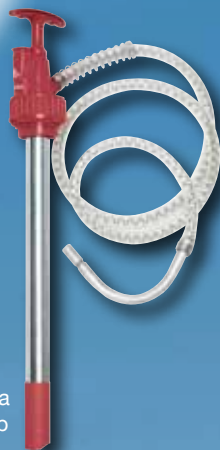

## 454110N Samoa Oil Transfer Kit with Meter

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)

**\$1,555.00**



## O30060 Alemlube EL Series Mobile 205L Oil Transfer Kit with Meter

- Flow rates of up to 10L/min
- Maximum operating pressure of 450psi (30bar)
- High mobility kit complete with 3:1 ratio oil pump, 1/2" ID hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drums & robust trolley

**\$1,557.00**



## 535510 Samoa 5:1 Ratio Oil Transfer Pump

- Air pressure operating range: 30 to 175 psi (2 to 12 bar)
- Maximum fluid outlet pressure: 875psi (60 bar)
- Flow rates of up to 30 L/min
- 1-1/2" BSP (f) fluid inlet / 1/2" BSP (f) fluid outlet

535530 Oil Transfer Stub Pump **\$1,485.00**

**\$1,643.00**



## 454695 Samoa IBC Oil Storage and Transfer Kit

- Includes a 3:1 ratio pump, dual pedestal hose reel with 10m of hose, a top mounting bracket and electronic oil meter
- Refillable, reusable, mobile and fully transportable
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- IBC not included

**\$4,032.00**



## 73920N Alemlube 1,000L Self Bunded Oil Tank

- Suitable for storing pure plant-based oil, waste oil and diesel fuel
- Double-walled safety
- Fully hot-dip galvanised steel outer skin
- Length of 1,135mm
- Width of 727mm
- Height of 1,540mm
- Weight of 80kg

**\$3,251.00**



## 365534 Samoa Electronic Oil Meter

- Maximum flow rate of 30L/min
- Maximum operating pressure of 1,450psi (100bar)
- Manual open/close nozzle minimises annoying oil drip and leakage
- Also suitable for use with ATF and antifreeze

**\$929.00**



## NEX.U. Fluid Management System

The Samoa NEX.U. Fluid Management System provides you with the control and the information you require to make your operation more profitable. You will be able to account for every drop of lubricant and other service fluids used.

Moreover, NEX.U. gives you opportunity to carry an efficient inventory control, with automatic alerts and fluid recording when needed, eliminating operations downtime.

NEX.U. is suitable for almost any lubricant usage or size of operation and quickly pays for itself. Once paid for, savings go right to your bottom line in the form of profit, profit previously lost.



**NEW**





**O30070**  
**Alemlube EL Series**  
**Mobile 205L Oil Transfer Kit**  
**with Meter and Hose Reel**

- Flow rates of up to 8L/min
- Suitable for use with engine, gear, hydraulic oils up to SAE130 and ATF
- High mobility kit complete with 3:1 ratio oil pump, oil hose reel with 15m x 1/2" ID hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drum and robust heavy duty trolley

**\$2,584.00**

**O30050**  
**Alemlube EL Series**  
**Oil Transfer Kit**  
**with Meter**

- Flow rates of up to 10L/min
- Includes a 3:1 ratio oil pump, 1/2" hydraulic hose, electronic oil meter and adjustable 2" bung adaptor
- Suits 205L drums and transfers engine, gear, hydraulic oils up to SAE130 and ATF

**\$853.00**



**10028**  
**Alemlube Heavy Duty**  
**20L Gear Oil Drum Pump**

- Non-drip nozzle and drain back holster ensure a clean, safe workshop
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use

**\$135.70**



**73900**  
**Alemlube**  
**700L Self Bunded Oil Tank**

- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of oil, waste oil and diesel fuel
- 2" BSPT(f) inlet ports
- Dimensions of 1,135mm (L) x 727mm (W) x 1,100mm (H)
- Manufactured in Germany

**\$2,832.00**



**454697**  
**Samoa IBC**  
**Oil Storage and Transfer Kit**

- Unit includes a 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket and an electronic oil meter
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Electronic oil meter powered by quickly and easily replaceable AAA batteries
- IBC not included

**\$3,975.00**



**536030**  
**Samoa 10:1 Ratio**  
**Oil Transfer Tank Pump**

- Double acting air operated 10:1 ratio transfer pump
- Air pressure rating 20 to 174psi (1.4 to 12 bar)
- Flow rates of up to 65 L/min
- 1/2" BSP (f) air inlet
- Robust carry handles facilitates quick & easy drum change over
- Lightweight at 17kg

**\$4,441.00**

NEX.U. is a hybrid system with all the advantages of wireless flexibility and hard-wired reliability.

**Wireless Flexibility**

- Data can be transmitted among the different system components, eliminating long and expensive cable runs
- Easily adds new components when required as your needs grow
- The system uses existing Wi-Fi networks so no need for custom network components

**Hard-Wired Reliability**

- A constant and reliable power source is always present to power the solenoid valves that control fluid delivery
- No uncharged batteries to let you down
- Hard-wire data transmission to avoid interferences and other obstacles which might interfere with wireless data transmission



**365300**  
**Samoa Electronic**  
**Preset Oil Meter**

- Automatically cuts off when the preset amount of lubricant is dispensed
- Maximum flow rate of 30L/min, minimum flow rate of 1L/min
- Maximum operating pressure of 994psi (69bar)
- Up to five preselected batch quantities are programmable into memory

**\$1,235.00**





## ALE-25BAH Alemlube 1" Air Operated Waste Oil Diaphragm Pump

- Aluminium body and hytel diaphragms
- 1" BSPT(f) inlet/outlet
- Flow rates of up to 160L/min
- Also suitable for the transfer of diesel fuel, gear oil, engine oil and antifreeze
- Manufactured in Japan

**\$2,328.00**



## ALE-20BAH Alemlube 3/4" Air Operated Waste Oil Diaphragm Pump

- Maximum flow rates of 100L/min
- 3/4" BSPT(f) inlet/outlet
- Aluminium body and hytel diaphragms
- Rugged bolted construction eliminates leaks and simplifies post maintenance reassembly
- Also suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze and waste water

**\$1,863.00**



## KPL-24EX Alemlube 24V 20kg Grease Kit

- A unique product, this 24V, 20kg grease kit is ideal for mining & heavy industrial applications
- Suitable for grease up to NLGI2
- Working pressure of 4,000psi (276bar)
- Dispenses up to 80g/min

**\$5,981.00**



## 555030 Samoa 1" Air Operated Diaphragm Pump

- Ideal for the transfer of oil, waste oil and diesel
- Flow rates of up to 200L/min
- Operating pressure range from 30psi (2bar) to 120psi (8bar)
- 1" BSP(f) inlet and outlet connections
- Maximum dry suction lift of 5m: wet suction lift of 8m
- Bolt holes similar to market leading alternatives

**\$2,068.00**



## ALE-15FPH Alemlube 1/2" Air Operated Waste Oil Diaphragm Pump

- Flow rates of up to 45L/min
- 1/2" BSPT(f) inlet/outlet
- Rugged bolted construction eliminates leaks and simplifies post maintenance reassembly
- Also suitable for the transfer of waste water, fuel, oil and some pesticides and herbicides

**\$1,221.00**



## DP70025 Alemlube EL Series 1" Air Operated Diaphragm Pump

- Flow rates of up to 180L/min
- Maximum working pressure of 120psi (8bar)
- 1" BSPT(f) fluid inlet/outlet
- Aluminium body with UPE diaphragms
- Maximum delivery per cycle of 450mL

**\$1,780.00**



## EPL-240SP Alemlube 240V 20kg Grease Kit

- A unique product, this 240V, 20kg grease kit is ideal for mining & heavy industrial applications
- Suitable for grease up to NLGI2
- Working pressure of 4,000psi (276bar)
- Dispenses up to 80g/min
- Suitable for working temperatures of between -10°C to +40°C

**\$6,222.00**

